

LOW INPUT CURRENT, HIGH GAIN OPTOCOUPLER

FEATURES

- High Current Transfer Ratio, 800%
- Low Input Current, 0.5mA
- High Output Current, 60mA
- Isolation Test Voltage, 2500 VAC_{RMS}
- TTL Compatible Output, VOL=0.1 V
- High Common Mode Rejection, 500V/μsec.
- Adjustable Bandwidth—Access to Base
- Standard Molded Dip Plastic Package
- Underwriters Lab File #E52744

APPLICATIONS

- Logic Ground Isolation—TTL/TTL, TTL/CMOS, CMOS/CMOS, CMOS/TTL
- EIA RS 232C Line Receiver
- Low Input Current Line Receiver—Long Lines, Party Lines
- Telephone Ring Detector
- 117 VAC Line Voltage Status Indication—Low Input Power Dissipation
- Low Power Systems—Ground Isolation

DESCRIPTION


High common mode transient immunity and very high current ratio together with 2500 VAC insulation are achieved by coupling an LED with an integrated high gain photo detector in an eight pin dual-in-line package. Separate pins for the photodiode and output stage enable TTL compatible saturation voltages with high speed operation. Photodarlington operation is achieved by tying the V_{CC} and V_O terminals together. Access to the base terminal allows adjustment to the gain bandwidth.

The 6N138 is ideal for TTL applications since the 300% minimum current transfer ratio with an LED current of 1.6 mA enables operation with one unit load-in and one unit load-out with a 2.2 KΩ pull-up resistor.

The 6N139 is best suited for low power logic applications involving CMOS and low power TTL. A 400% current transfer ratio with only 0.5 mA of LED current is guaranteed from 0°C to 70°C.

Caution:

Due to the small geometries of this device, it should be handled with Electrostatic Discharge (ESD) precautions. Proper grounding would prevent damage further and/or degradation which may be induced by ESD.

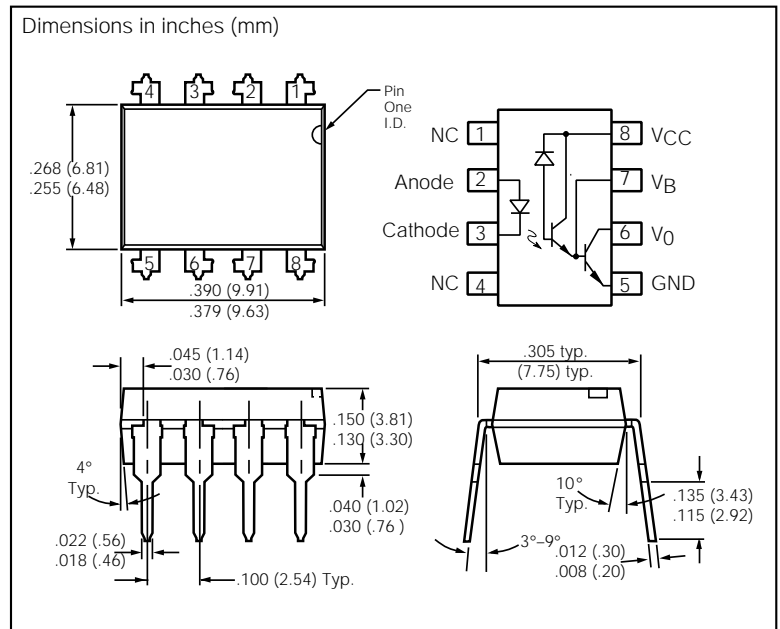

Maximum Ratings

Reverse Input Voltage	5 V
Supply and Output Voltage, V _{CC} (pin 8-5), V _O (pin 6-5)	
6N138	-0.5 to 7 V
6N139	-0.5 to 18 V
Emitter-Base Reverse Voltage (pin 5-7)	0.5 V
Average Input Current	20 mA
Peak Input Current (50% Duty Cycle—1 ms pulse width)	40 mA
Peak Transient Input Current (tp≤1 μsec, 300 pps)	1.0 A
Output Current I _O (pin 6)	60 mA
Derate linearly above 25°C, free air temperature at 0.7 mA/°C	
Input Power Dissipation	35 mW
Derate linearly above 50%, free air temperature at 0.7 mW/°C	
Output Power Dissipation	100 mW
Derate linearly above 25°C, free air temperature at 0.2 mA/°C	
Isolation Test Voltage	2500 VAC _{RMS}
Isolation Resistance	
V _{IO} =500 V, T _A =25°C	≥10 ¹² Ω
V _{IO} =500 V, T _A =100°C	≥10 ¹¹ Ω
Storage Temperature	-55°C to +125°C
Operating Temperature	-55°C to +100°C
Lead Soldering Temperature (t=10 sec.)	260°C

Electro-Optical Characteristics ($T_A=0^{\circ}\text{C}$ to 70°C , $T_A=25^{\circ}\text{C}$ —Typical, unless otherwise specified)

Parameter	Symbol	Device	Min	Typ.	Max.	Units	Test Conditions	Note
Current Transfer Ratio	CTR	6N138	300	1600		%	$I_F=1.6\text{ mA}$, $V_O=0.4\text{ V}$, $V_{CC}=4.5\text{ V}$	5.6
		6N139	400 500	1600 2000		%	$I_F=0.5\text{ mA}$, $V_O=0.4\text{ V}$, $V_{CC}=4.5\text{ V}$ $I_F=1.6\text{ mA}$, $V_O=0.4\text{ V}$, $V_{CC}=4.5\text{ V}$	5.6
Logic Low	V_{OL}	6N138		0.1	0.4	V	$I_F=1.6\text{ mA}$, $I_O=4.8\text{ mA}$, $V_{CC}=4.5\text{ V}$	6
Output Voltage		6N139		0.1	0.4	V	$I_F=1.6\text{ mA}$, $I_O=8\text{ mA}$, $V_{CC}=4.5\text{ V}$	6
		6N139 6N139		0.15 0.25	0.4 0.4	V	$I_F=5\text{ mA}$, $I_O=15\text{ mA}$, $V_{CC}=4.5\text{ V}$ $I_F=12\text{ mA}$, $I_O=24\text{ mA}$, $V_{CC}=4.5\text{ V}$	
Logic High	I_{OH}	6N138		0.1	250	μA	$I_F=0\text{ mA}$, $V_O=V_{CC}=7\text{ V}$	6
Output Current		6N139		0.05	100	μA	$I_F=0\text{ mA}$, $V_O=V_{CC}=18\text{ V}$	6
Logic Low Supply Current	I_{CCL}			0.2	1.5	mA	$I_F=1.6\text{ mA}$, $V_O=\text{OPEN}$, $V_{CC}=18\text{ V}$	6
Logic High Supply Current	I_{CCH}			0.001	10	μA	$I_F=0\text{ mA}$, $V_O=\text{OPEN}$, $V_{CC}=18\text{ V}$	6
Input Forward Voltage	V_F			1.4	1.7	V	$I_F=1.6\text{ mA}$, $T_A=25^{\circ}\text{C}$	
Input Reverse Breakdown Voltage	BV_R		5			V	$I_R=10\text{ }\mu\text{A}$	
Temperature Coefficient of Forward Voltage				-1.8		mV/ $^{\circ}\text{C}$	$I_F=1.6\text{ mA}$	
Input Capacitance	C_{IN}			25		pF	$f=1\text{ MHz}$, $V_F=0$	
Input-Output Insulation Leakage Current	I-O				1.0	μA	45% Relative Humidity, $T_A=25^{\circ}\text{C}$ $t=5\text{ s}$, $V_{I-O}=3000\text{ VDC}$	7
Resistance (Input-Output)	R_{I-O}			10^{12}		Ω	$V_{I-O}=500\text{ VDC}$	7
Capacitance (Input-Output)	C_{I-O}			0.6		pF	$f=1\text{ MHz}$	7

Switching Specifications ($T_A=25^{\circ}\text{C}$)

Parameter	Symbol	Device	Min	Typ.	Max.	Units	Test Conditions	Note
Propagation Delay Time	t_{PHL}	6N138		2	10	μS	$I_F=1.6\text{ mA}$, $R_L=2.2\text{ K}\Omega$	
To Logic Low at Output		6N139		6 0.6	25 1	μS	$I_F=0.5\text{ mA}$, $R_L=4.7\text{ K}\Omega$ $I_F=12\text{ mA}$, $R_L=270\text{ }\Omega$	6,8
Propagation Delay Time	t_{PLH}	6N138		2	35	μS	$I_F=1.6\text{ mA}$, $R_L=2.2\text{ K}\Omega$	
To Logic High at Output		6N139		4 1.5	60 7	μS	$I_F=0.5\text{ mA}$, $R_L=4.7\text{ K}\Omega$ $I_F=12\text{ mA}$, $R_L=270\text{ }\Omega$	6,8
Common Mode Transient Immunity at Logic High Level Output	CM_H			500		V/ μS	$I_F=0\text{ mA}$, $R_L=2.2\text{ K}\Omega$ $R_{CC}=0/V_{CM}=10\text{ V}_{p-p}$	9,10
Common Mode Transient Immunity at Logic Low Level Output	CM_L			-500		V/ μS	$I_F=1.6\text{ mA}$, $R_L=2.2\text{ K}\Omega$ $R_{CC}=0/V_{CM}=10\text{ V}_{p-p}$	9,10

Notes

- Derate linearly above 50°C free-air temperature at a rate of $0.4\text{ mA}/^{\circ}\text{C}$.
- Derate linearly above 50°C free-air temperature at a rate of $0.7\text{ mW}/^{\circ}\text{C}$.
- Derate linearly above 25°C free-air temperature at a rate of $0.7\text{ mA}/^{\circ}\text{C}$.
- Derate linearly above 25°C free-air temperature at a rate of $2.0\text{ mW}/^{\circ}\text{C}$.
- DC current transfer ratio is defined as the ratio of output collector current, I_O , to the forward LED input current, I_F times 100%.
- Pin 7 open.
- Device considered a two-terminal device: pins 1, 2, 3 and 4 shorted together and pins 5, 6, 7 and 8 shorted together.
- Using a resistor between pin 5 and 7 will decrease gain and delay time.
- Common mode transient immunity in logic high level is the maximum tolerable (positive) dV_{CM}/dt on the leading edge of the common mode pulse, V_{CM} , to assure that the output will remain in a logic high state (i.e. $V_O>2.0\text{ V}$) common mode transient immunity in logic low level is the maximum tolerable (negative) dV_{CM}/dt on the trailing edge of the common mode pulse signal, V_{CM} , to assure that the output will remain in a logic low state (i.e. $V_O<0.8\text{ V}$).
- In applications where dv/dt may exceed $50,000\text{ V}/\mu\text{s}$ (such as state discharge) a series resistor, R_{CC} should be included to protect I_C from destructively high surge currents. The recommended value is

$$R_{CC} \cong \frac{IV}{0.15I_F(\text{mA})} \text{ k}\Omega$$

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.